


46" (High Brightness) industrial monitor series




Our industrial monitor solution is a fully configured, flexible display solution with 15pin D-SUB and DVI input. The product is housed in a rugged Closed Frame mechanical solution with standard VESA mountings allowing you complete flexibility in product design. So, can be customized as your requirement. LED backlighting allows for state-of-the-art slim design while reducing power consumption and ensure high quality/durability.

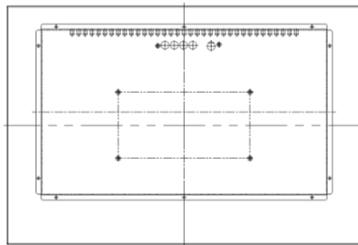

Application

- > Gaming solution
- > Kiosks
- > Self-service and ticketing
- > Digital signage

Drawing

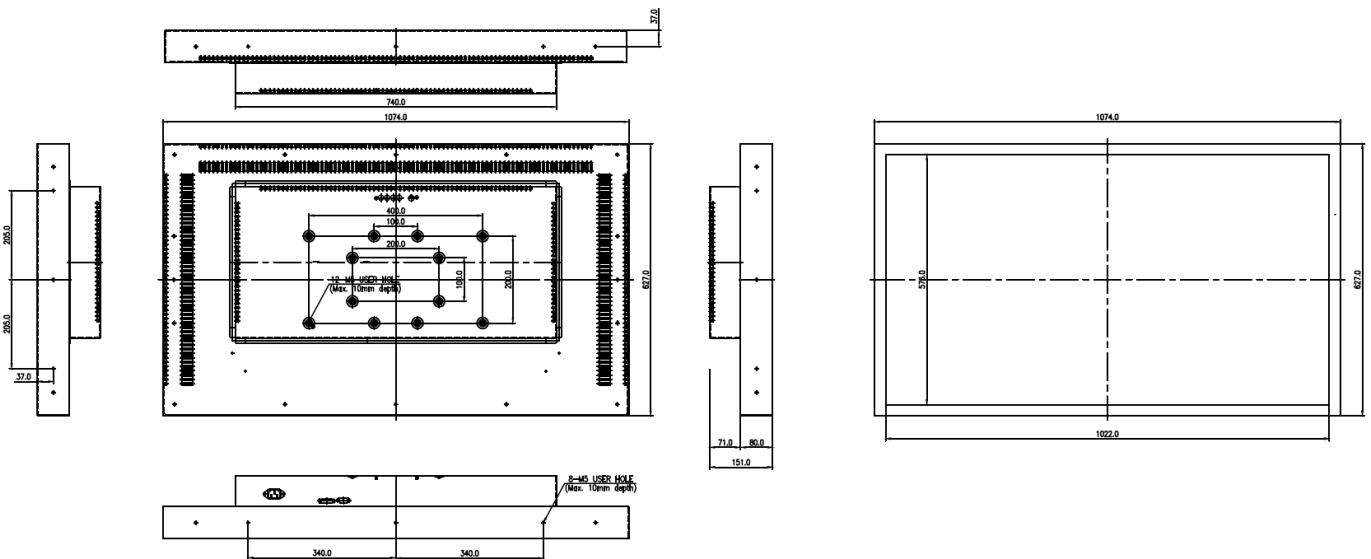

Model	DMH-460CRDW-001
Diagonal size	46.0"
Recommended Resolution	1920x1080@60Hz
Active area	1021.2(W) x 576.0(H)mm
Colors	16.7 million colors
Brightness (Typical)	2,500nits
Response time(Typical)	6ms
Viewing angle(L/R, U/D_CR≥10)	89/89,89/89°
Contrast ratio(Typical)	5,000 : 1
Other supported resolutions	640x350@70Hz, 720x400@70Hz, 640x480@60~75Hz, 800x600@56~75Hz, 1024x768@60~75Hz, 1440x1050@60Hz, 1680x1050@60Hz
Input signal	15pin D-SUB,DVI (option -> Display port, HDMI, Composite)
Temperature	Operating : 0 ~ +60°C, Storage : -30 ~ +80°C
Humidity	Operating : 20 ~ +80°C, Storage : 10 ~ +90°C
Power	110~240AC input
Monitor dimension	1074.0mm x 627.0mm x 151.0mm
Case material	Non black powder coated EGI (1mm thickness option-> Aluminium,SUS..etc)
Mounting option	VESA-12 holes as 200 x 100, 400 x 200mm 2-hole mounting interface on all 4 sides
OSD control	Picture – Brightness, Contrast, Sharpness, H position, V position, Clock, Phase Color – Color status Management, Red, Green, Blue, Auto Color OSD - Language, H position, V position, Transparency, OSD time Setup – Source, Factory reset, Aspect, Backlight DIM, Set ID, Volume, Mute
Available touch solution	Projective Capacitive, Surface Capacitive touch, InfraRed
Packing dimension, weight	1200 x 750 x 270mm, 28kg