

# IDS SQ-DTC

REAL-TIME TIME CODE INFORMATION TO ANY DISPLAY ON YOUR IDS NETWORK

DATA SHEET

## IDS SQ-DTC

The IDS SQ-DTC provides control and monitoring of production timers and other time code devices, delivering accurate real-time information to any display on your IDS network.



The compact device is housed in a rugged aluminium enclosure, making it ideal for applications with little space. It connects to your network via Ethernet and, with its combination of PoE and tiny size, can be installed quickly and discreetly.

Setup and management of the unit is straightforward, using the Windows® based configuration software supplied. It supports DHCP for automatic acquisition of IP address, but can be configured manually for a static IP if required.

Firmware updates will be available via our website.

## Applications

The SQ-DTC is an ideal companion to a Harris production timer, meaning that all your station's production timings can be managed by IDS and sent to any display device on your IDS network.

Any number of units can be installed on your system.


## What is IDS?

IDS. The super cool intuitive and revolutionary workflow information solution. Originally designed as a simple clock and tally system for broadcasters, IDS harvests information from across wide area networks, aggregating it using a simple toolset, providing facilities with the power to display only the information you want, the way you want it. Boundless flexibility that lets you into a world of simple integration giving you access and total control of essential equipment at a touch by using an IDS touchscreen.

IDS is the cutting edge media technology solution and can be scaled to suit any installation, whether Industrial, Service, Broadcast, AV, Education, Defence, Medical or Corporate. Simplifying the complicated, putting the user in charge. IDS already brings groundbreaking solutions to a prestigious set of customers around the globe.

## Key Features

- Windows® configuration utility
- Stand-alone USB setup
- Assignable network configuration
- PoE simplifies installation
- 10/100 RJ45 Ethernet
- Very low power consumption
- Compact, rugged construction
- CE marked for sale in EU
- 2-year warranty

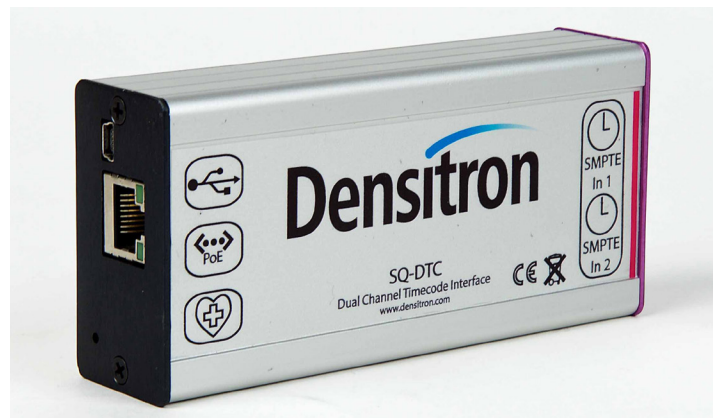

## Key Benefits

- Interface with Harris UDT-5700 to deliver real-time code information to any display
- Dual LTC inputs
- Monitor two external real-time time codes on any IDS display device
- Send two countdown timers to four IDS displays

## Technical specifications

- Construction: 1.8mm Aluminium
- Dimensions: L 123 x W 58 x H 30 mm
- Weight: 185g
- Connectors: Mini-USB, RJ45, D15
- Power supply: PoE 48V
- Power consumption: 2 to 3W
- Operating temperature: 0°C to +50°C
- Approvals: CE